


TECHNICAL SPECIFICATION




**AB
14**

REAR ELEVATION

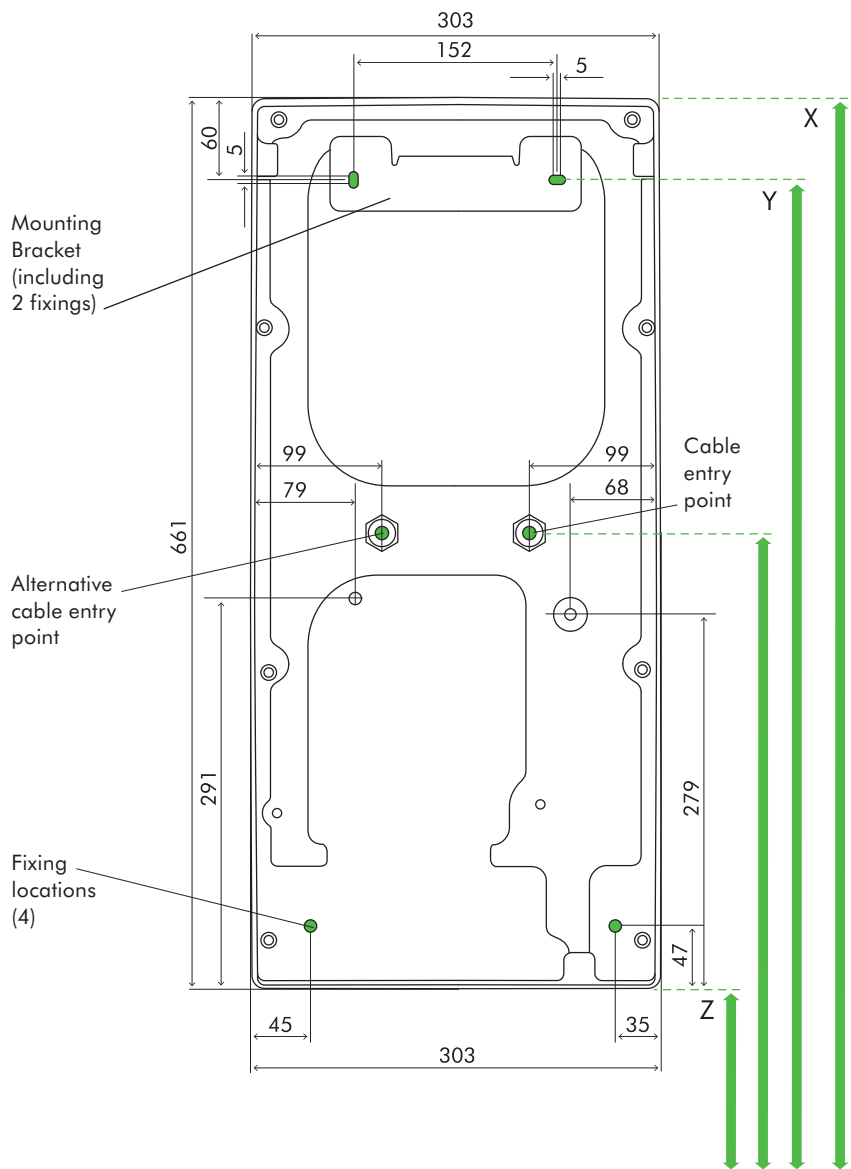

SIDE ELEVATION

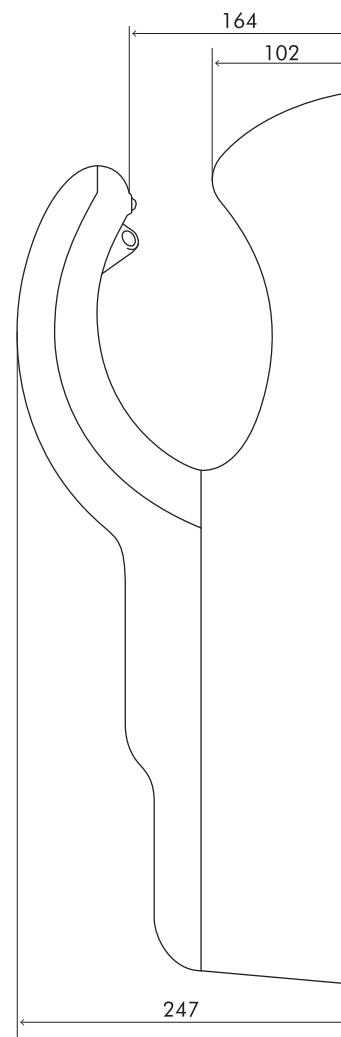

All dimensions shown in mm (+/-5mm)



Recommended installation heights from floor			
Male	X 1050mm	Y 990mm	Z 390mm
Female	X 975mm	Y 915mm	Z 315mm
Child or disabled	X 875mm	Y 815mm	Z 215mm
Machine dimensions			
Height 661mm Width 303mm Depth 247mm			

Minimum clearance	
200mm from floor; 50mm clearance either side and above machine.	
Cable entry point from floor	
Male	725mm
Female	650mm
Child or disabled	550mm

dyson airblade dB

AB
14

Electrical

Input voltage/Frequency: 200-240V 50 & 60 Hz

Rated power: 1600 W

Motor type: Dyson digital motor V4 – brushless DC Motor

Motor switching rate: 6,000 per second

Motor speed: 90,000 rpm

Operating temperature range: 0°– 40°C

Heater type: None

Standby power consumption: Less than 0.5 W

Construction

Casing construction: Polycarbonate-ABS casing

Antibacterial coating type: Contains antibacterial moulded additive in fascia and blades. Can help prevent the growth of bacteria.

Colour finish: Grey or White

Light reflective value: 28.3 (grey) 77.4 (white)

Galvanised steel back plate/mounting bracket

Exterior screw type: Anti-tamper M6 machine screw

Water ingress protection to IP35

Filter

HEPA filter (glass fibre and fleece prelayer)

Bacteria removal 99.9%

Operation

Touch-free infra-red activation

Hand dry time measurement: 10 seconds.

(Measurement based on National Sanitation Foundation Protocol P.335)

Operation lock-out period: 30 seconds

Airspeed at apertures: 690 km/h (430 mph)

Operating airflow: Up to 35 l/s

Logistics

Serial number prefix: Grey FT4; White FT5

Single unit order code:

Grey 300677-01; White 300678-01

Net weight: 8.2kg

Packaged weight: 11kg

Packaged dimensions: H735 × W359 × D305 mm

Unit barcode: Grey 5025 1550 1696 1; White 5025 1550 1695 4

Standard guarantee

5 year parts, 1 year labour guarantee



Product range

Grey

White

