


## Dyson backplate technical specification



**HU  
03**

Front elevation

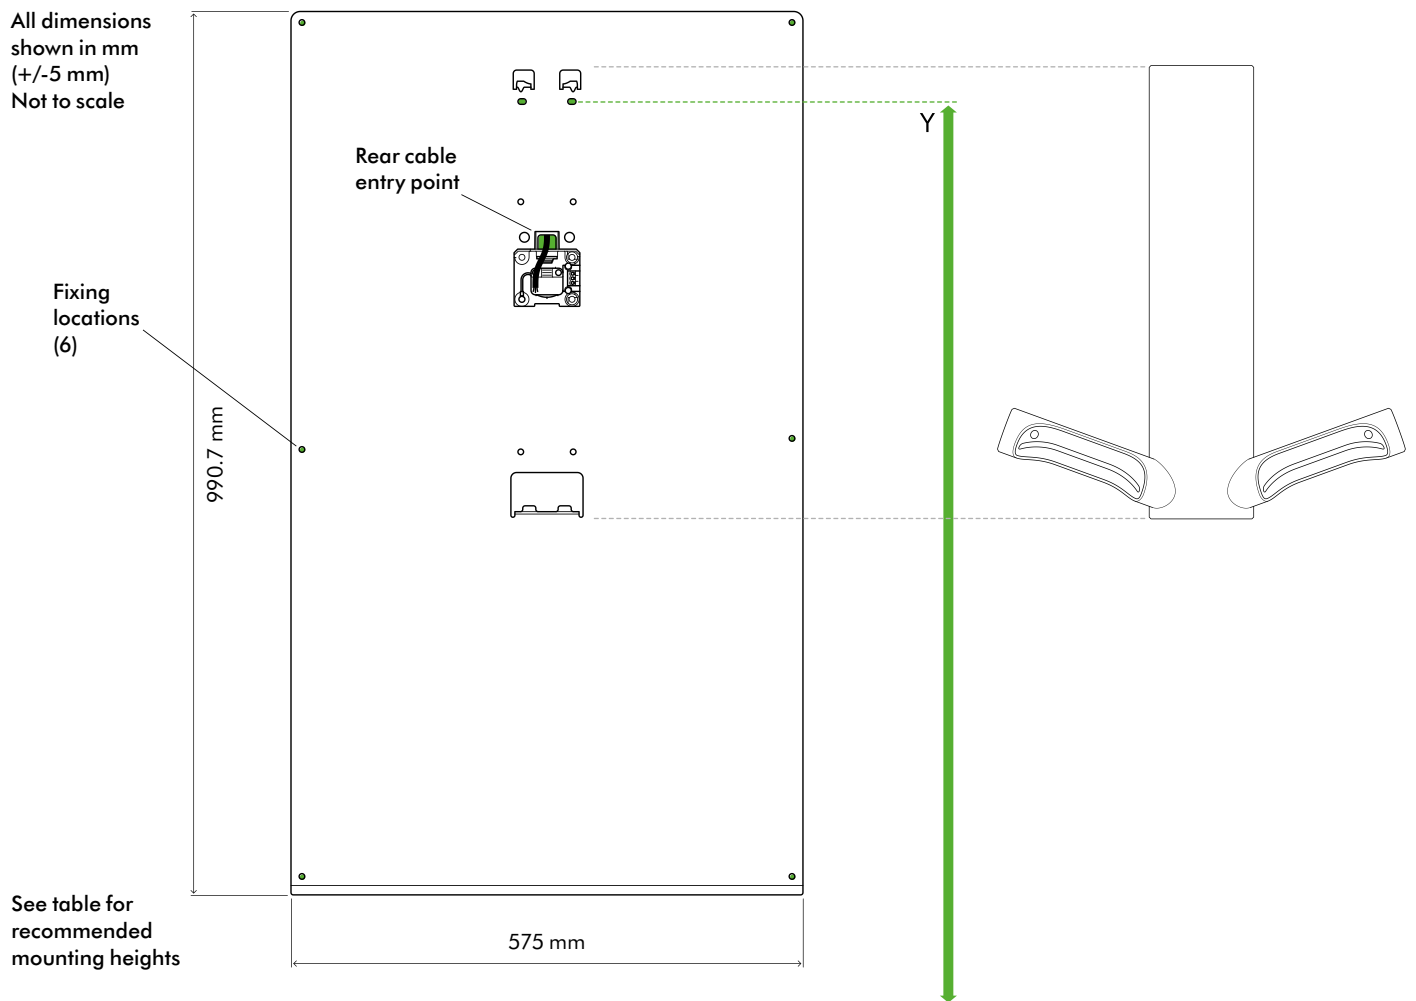

FLOOR

### Recommended installation heights from floor

Male	Y 1451 mm
Female	Y 1416 mm
Wheelchair user	Y 1207 mm
Child 5-8	Y 1079 mm
Child 8-11	Y 1179 mm
Child 11-14	Y 1256 mm

### Dyson backplate dimensions

Height 991 mm Width 575 mm Depth 5 mm

### Minimum clearance above machine

	210 mm
<b>Rear cable entry point from floor</b>	
Male	1293 mm
Female	1258 mm
Wheelchair user	1049 mm
Child 5-8	921 mm
Child 8-11	1021 mm
Child 11-14	1098 mm

For further information please contact ozwashroom

AU: 1300 652 715  
[info@ozwashroom.com.au](mailto:info@ozwashroom.com.au)  
[www.ozwashroom.com.au](http://www.ozwashroom.com.au)

HU  
03

## Installing the Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. Fixing to unsupported plasterboard (drywall) without the aid of a Dyson backplate will not result in safe and secure installation for your machine, and may also invalidate your guarantee.

If the wall you are fixing the machine to has an airgap, the fixings used must be of a sufficient length to provide a secure installation. Do not use sealant when attaching the machine to the wall.

The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products – including the Dyson Airblade dB hand dryer.

Contact the Dyson Helpline for further information.

## Construction

Stainless steel (brushed)

Back plate mounting bracket: Stainless steel – Brushed (304L)

## Logistics

Net weight: 6.7 kg /14.7 lbs

Packaged weight: 11.10 kg / 24.47 lbs

Packaged dimensions:  
(H) 71 × (W) 664 × (D) 1295 mm

## Standard guarantee

5 year guarantee



For further information please contact ozwashroom

AU: 1300 652 715  
info@ozwashroom.com.au  
www.ozwashroom.com.au